



FREEFLOW LOUVRES

CVS Freeflow Operable Louvres are designed to achieve the engineering and architectural requirements for maximum natural ventilation and weatherproofing. They are a perfect solution where maximum natural airflow ventilation is required while still maintaining a level of weather resistance.



CVS Freeflow Operable Louvres can be manufactured from a range of materials including:


- Aluminium
- Colorbond
- Galvanised Steel
- Stainless Steel

Most common uses for CVS Freeflow Operable Louvres are:

- Ventilating Plant and Equipment Rooms
- Building Facades
- Fume Intake and Exhaust Ventilation
- Chemical Storage Ventilation
- Warehouse Ventilation
- Heat Reduction Ventilation




CVS Freeflow Operable Louvres can be coated in a range of different finishes to suite specific requirements, including warranty and custom colour powder coat through to bright coloured anodising.

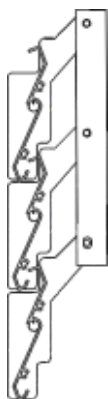


0500P

150mm

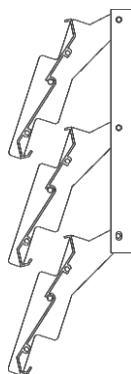

0750P

150mm

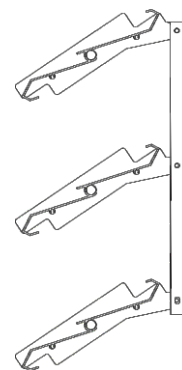

0900P

150mm



Louvre & Sunscreen Specialists

☎ 02 8796 3000

✉ sales@cvsgroup.com.au

www.cvsgroup.com.au